

MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

COMFORT

AIR COOLED CHILLERS WITH INVERTER SCREW COMPRESSORS

i-FX-GO4

**AIR COOLED CHILLERS WITH INVERTER SCREW
COMPRESSORS AND HFO REFRIGERANT
FROM 377 TO 1463 kW**

r HFO
1234ze

**TOTAL
INVERTER
TECHNOLOGY**



i-FX-G04

THE GREEN IMPERATIVE CHILLER FOR THE HIGHEST EFFICIENCY

EER up to 3,36

SEER up to 5,32



Air cooled chiller with inverter screw compressors and HFO 1234ze refrigerant. From 377 to 1463 kW



i-FX-G04 is the eco-friendly and high performing chiller that matches full inverter technology with green HFO refrigerant.

Dedicated to comfort applications – from small retail projects to large commercial and district cooling schemes, the new air cooled chiller with full inverter screw compressors meets the highest efficiency targets required by modern buildings, at the same time delivering a green approach to any centralized air conditioning system.

LEADING INVERTER TECHNOLOGY



The new i-FX-G04 showcases the latest variable speed technology applied on:

- dual screw compressors with integrated refrigerant cooled inverter motor and variable Vi technology
- high efficiency variable speed fans
- integrated variable speed hydronic modules (opt.)

THIS INCREDIBLE PERFORMING CHILLER ADJUSTS THE ROTATIONAL SPEED AND THE INTERNAL GEOMETRY TO:

- ✓ perfectly match the cooling load of the plant in any condition
- ✓ offer stepless and accurate capacity control
- ✓ ensure premium efficiency values, thus cutting operating costs

UNCOMPROMISED EFFICIENCY

2021 ECODESIGN DIRECTIVE COMPLIANT

Thanks to the latest variable speed technology applied both on the compressors and on the fans, i-FX-G04 achieves uncompromised part load efficiency values.

The new family exceeds the strictest 2021 Ecodesign Directive tier, placing it on the top level of the market.



EXTENDED OPERATING RANGE



Wide operating range, working with outdoor air temperatures from -15°C up to +55°C thanks to specifically developed options and smart control logics.

ACOUSTIC VERSIONS

-	Standard	Unit with standard compressor's enclosures. Unit with noise reducer kit (Opt. 2315).	Baseline -3 dB(A)
SL	Super low noise	The highest level of noise reduction which cuts noise emissions down to -9dB(A), without compromising the unit's efficiency.	-9 dB(A)

HEAT RECOVERY CONFIGURATIONS

-	Standard unit	Unit for the production of chilled water.
D	Partial heat recovery	Unit for the production of chilled water, equipped with an auxiliary heat exchanger on the compressor discharge for superheat recovery.

ALL-ROUND SUSTAINABILITY



i-FX-G04 is the result of Mitsubishi Electric Hydronics & IT Cooling Systems' extensive approach to sustainability.

Achieving outstanding performance and ensuring long-term sustainability are challenges that modern HVAC systems need to tackle. Increasing concerns about the global warming impact of chillers and heat pumps is driving new regulatory policies

to push towards even more efficient units with the lowest carbon footprint. Today, an all-round approach is the only way to effectively reduce the Total Equivalent Warming Impact (TEWI).


Fully committed to support the creation of a greener tomorrow, Mitsubishi Electric Hydronics & IT Cooling Systems designed i-FX-G04, a complete chiller range optimized for HFO refrigerant R1234ze, with nearly zero environmental impact.

Combining brilliant annual efficiency with the use of a low GWP refrigerant, i-FX-G04 tackles both the indirect (due to the primary energy consumption) and the direct global warming impact, thus resulting the perfect choice for any new, forward-looking cooling system.

The environmental impact of the refrigerants is measured by two parameters:

- ▶ **ODP:** Ozone Depletion Potential
- ▶ **GWP:** Global Warming Potential

While in the past the focus was on reducing ODP values to 0, new regulations encourage Member States to work harder on GWP.

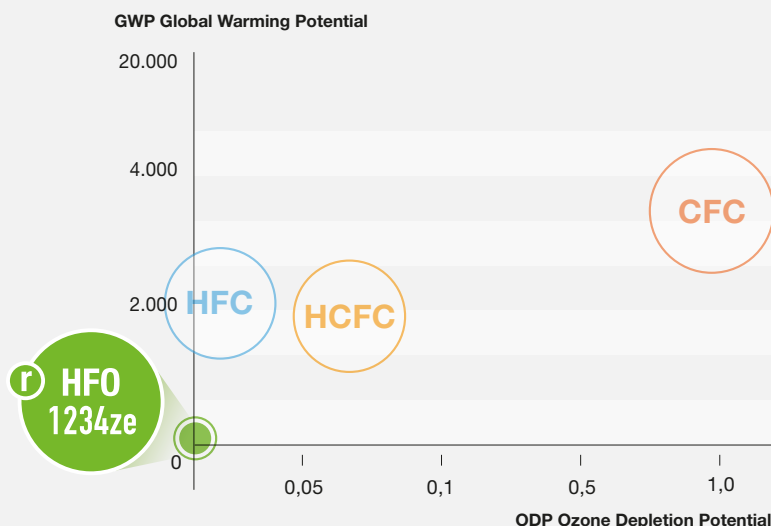

The path to a greener world

Starting from the 70s, several international agreements have been made to drive the industry towards eco-friendly refrigerants. The last crucial step was taken in 2016, when the Kigali Amendment to the Montreal Protocol was passed, paving the way for the global phasedown of HFCs.



QUICK&EASY INSTALLATION AND MAINTENANCE



A vast array of already mounted options together with a smart unit design for quick and easy installation and maintenance operations.

HIGH DEGREE OF CONFIGURABILITY




Always the right solution for every project thanks to many specifically developed versions and a bespoke list of options (e.g. the integrated hydronic modules, several water flows controls).



FULL INVERTER TECHNOLOGY



HIGHER ENERGY EFFICIENCY

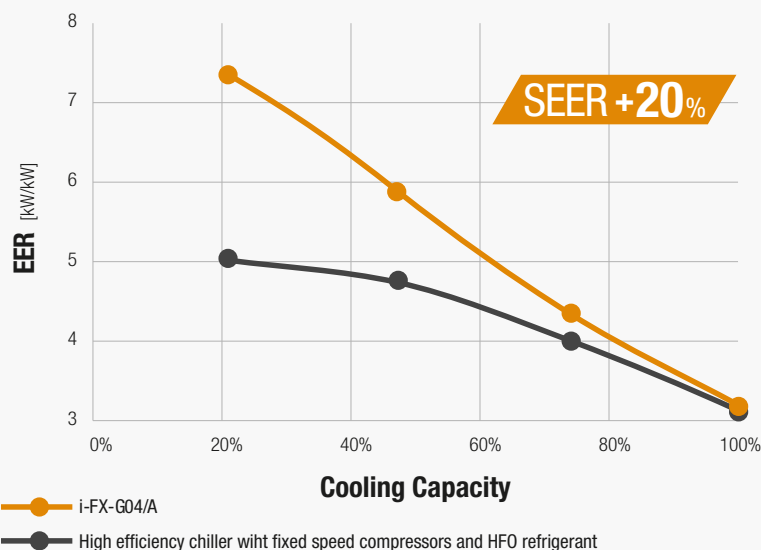

The increase in efficiency compared to high efficiency ErP 2018 compliant fixed speed units is expressed by drawing the EER trend to the conditions defined by the ErP directive 2009/125 /EC necessary for the calculation of SEER seasonal parameters.

ErP 2021 COMPLIANT




In most of cases, in comfort applications units are working at full load only for a very few hours every year.

This means that most of the time the units are working partialized. In this condition the inverter and variable Vi technology makes the real difference in terms of efficiency, even compared to the latest generation high efficiency fixed speed units.



ABSENCE OF IN-RUSH CURRENTS

The inverter technology involves a start-up phase with very low in-rush current. The frequency converters chosen by Mitsubishi Electric are characterized by values of Displacement Power Factor of between 0,97 and 0,99.

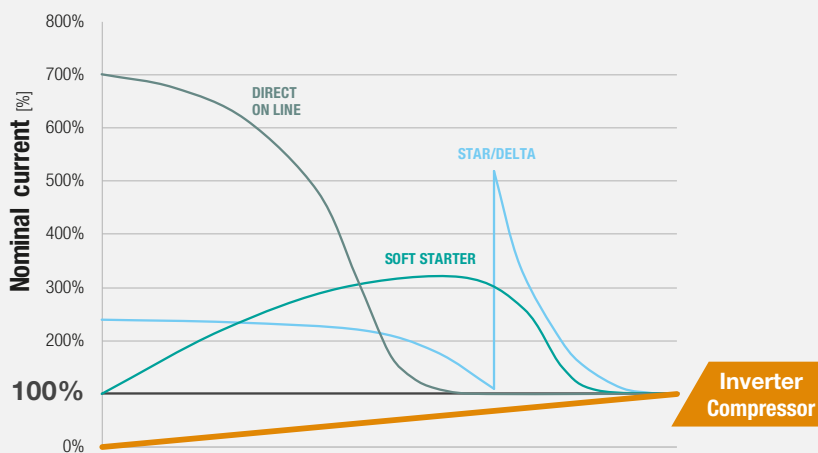

No electrical and mechanical stress

The unit never exceeds the nominal current, not even when starting up.


No additional equipment needed

Such as star/delta commutators or soft starters in order to reduce the in-rush currents.

The new i-FX-G04 chillers apply variable speed technology in all of its main components, achieving top-level performances in any load condition.



REDUCED SOUND POWER LEVELS

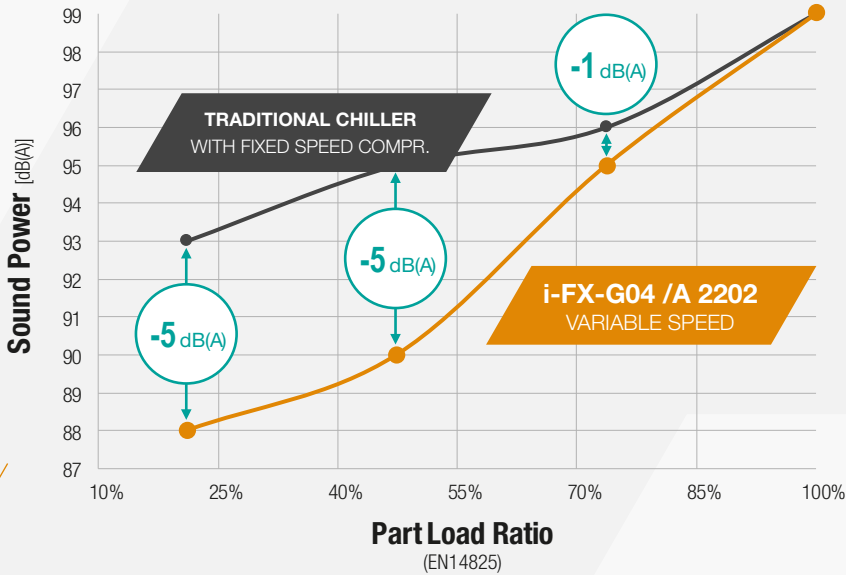

LOWER SPEED, LOWER NOISE

The unit working in partial loads is far more silent than a fixed speed compressor unit.

In applications with units working at part load for most of the year, i-FX-G04 ensures extremely low noise operations down to -5dB(A).


Ideal for sound sensitive environments

- ✓ Museums and Theatres
- ✓ Hospitals
- ✓ Institutions
- ✓ Hotels



FLEXIBLE SELECTION

The smart design of the units combined with the ELCAWorld selection software allows you to always choose the right unit for every project, prioritizing efficiency, additional future plant demands or reducing the initial investment and the footprint.

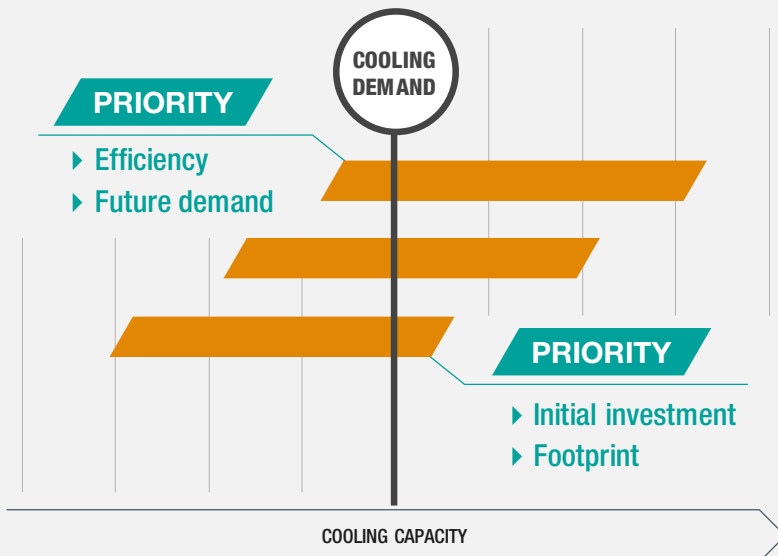

Choose YOUR target

- EFFICIENCY**
- INITIAL INVESTMENT**
- FOOTPRINT**
- FUTURE PLANT DEMANDS**

TECHNOLOGICAL CHOICES

W3000TE CONTROL

Fully in-house developed management software.

- ▶ Efficient and reliable operation in all conditions
- ▶ Connectivity with the most commonly used BMS protocols (Opt.)


KIPLink USER INTERFACE

Innovative Wi-Fi interface for an easy and enhanced unit management.



Variable speed fans

High performing EC fans, for higher efficiency and continuous speed modulation

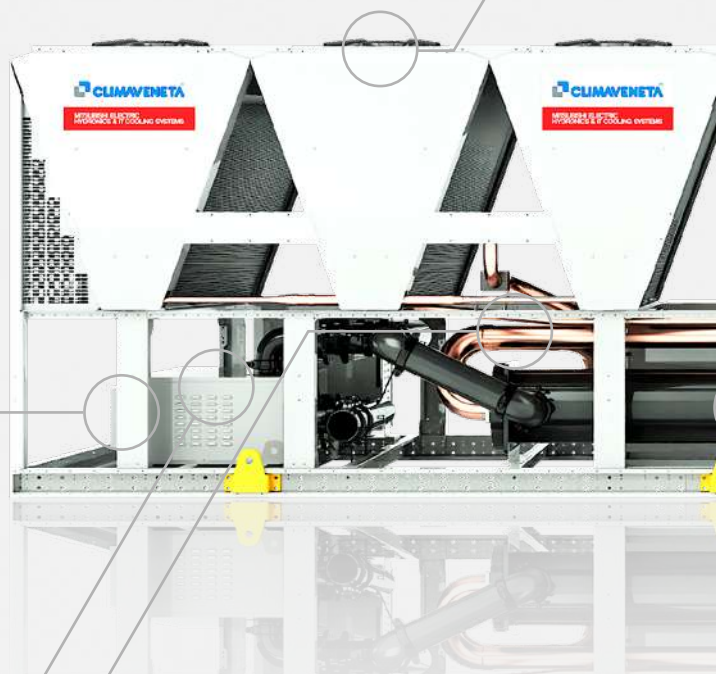

Built-in pump group (Opt.)

Factory-mounted pumps and pre-plumbed hydraulic components, for minimum on-site installation time, work, and cost.

- ▶ Fix speed and variable speed pumps available, with low or high head
- ▶ Electronic primary flow controls for constant pressure or constant temperature

Gas detector device


Included as standard for each refrigerant circuit. In case of refrigerant leak detection, this device raises an alarm.

Refrigerant circuits

One independent refrigerant circuit per compressor, to grant reliability and easy maintenance. Compressor enclosures are supplied as standard in all versions.

CSCV Compressors Engineered for R1234ze refrigerant

Inverter, Variable Vi dual rotor screw compressors, designed according to Mitsubishi Electric Hydraulics & IT Cooling Systems specifications and for its' exclusive use.

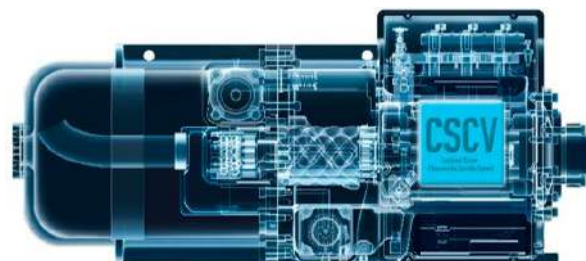


Trusted reliability, simplified installation, maximized performance: i-FX-G04 improves the already high performance of the fixed speed chiller range adding new exceptional features.

r HFO
1234ze

Micro-channel coils

New generation full aluminum micro-channel coils, ideally positioned on a "V" block structure to optimize airflow and heat transfer.

- ▶ Up to 30% of refrigerant charge reduction vs. traditional tube and fin coils.
- ▶ Long Life Alloy (LLA) for higher corrosion resistance and longer life cycle
- ▶ Protective coating available for harsh industrial and marine environments (Opt.)

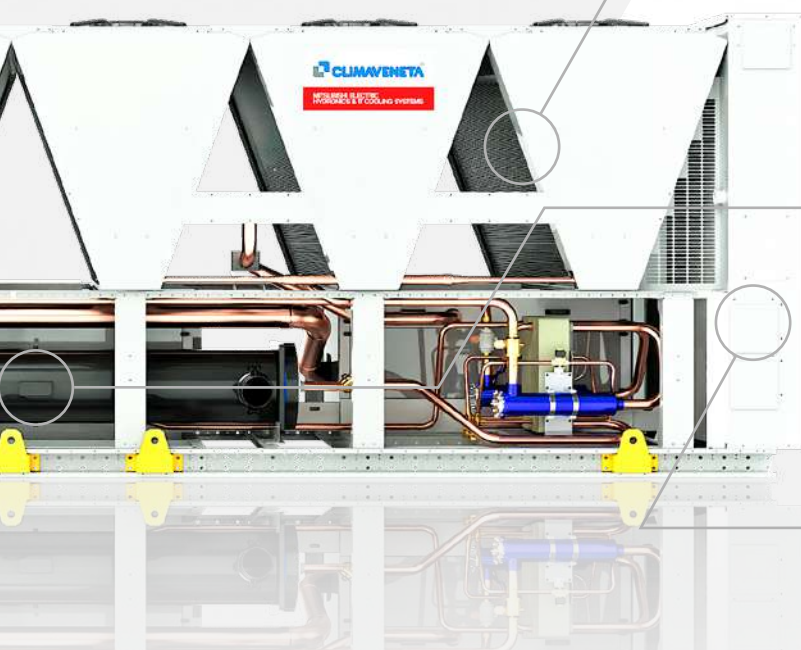

HFO refrigerant

4th generation refrigerant HFO 1234ze, with negligible greenhouse effect and zero impact on the ozone layer.

Negligible GWP

HFO 1234ze GWP_{100 year} < 1

(R134a GWP_{100 year} = 1300)

GWP values according to IPCC rev. 5th

Rapid molecule disintegration in the atmosphere

HFO 1234ze = 2 weeks

(R134a = 14 years)

Approved by international standards

ASHRAE 34, ISO 817:

A2L classification (non toxic, mildly flammable)

Compatible with common construction materials

No special components

No extra cost

In-line with environmental regulation objectives

No future retrofit required

Shell and tube evaporator

Dry expansion, single pass shell and tube evaporator, fully developed by Mitsubishi Electric Hydraulics & IT Cooling Systems.

- ▶ Internally grooved copper tubes for enhanced heat exchange
- ▶ Low pressure drops
- ▶ Fully protected against ice formation

Electrical panel

Large electrical panel with power circuit components and control main board.

- ▶ Forced-air cooling system

SMART VARIABLE Vi LOGIC

Variable Speed Drive

Integrated and compact frequency converter, refrigerant cooled, for outstanding seasonal efficiency and wide capacity regulation.

Automatic internal volume ratio adaption


Obtained thanks to an integrated Vi slider which adapts the internal geometry to the current operating condition, thus ensuring the best efficiency.

Extra durability achieved thanks to dedicated components:

- Envelope control function, 3-stage warning and alarm system, safe-torque-off function.
- Carbon steel bearings granted for a lifetime of over 150.000 hours.

High efficiency high speed motor

For unprecedented full and part load efficiencies and extremely wide and accurate capacity regulation.

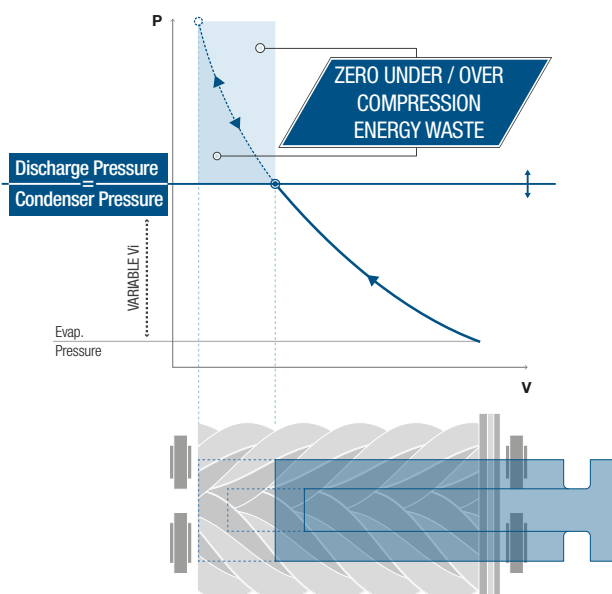

CORE FEATURES FOR ALL YOUR EQUIPMENT NEEDS

W3000TE control and KIPLink innovative interface

The logic behind i-FX-G04 is the W3000TE control software. Characterized by advanced functions and algorithms, **W3000TE features proprietary settings** that ensure faster adaptive responses to different dynamics, in all operating modes. Direct control over the unit comes through the innovative KIPLink interface.

Based on Wi-Fi technology, **KIPLink** gets rid of the standard keyboard and **allows one to operate on the unit directly from a mobile device** (smartphone, tablet, notebook).



Easier on-site operation

Monitor each component while moving around the unit for maintenance operations. View and change all parameters with easy-to-understand screenshots and dedicated tooltips. Get devoted "help" message for alarm reset and trouble shooting.




Real-time graphs and trends

Monitor the immediate labor status of the compressors, heat exchangers, cooling circuits and pumps. View the real-time graphs of the key operating variable trends.



Data logger function

View history of events and use the filter for a simple search. Enhance diagnostics with data and graphs of 10 minutes before and after each alarm. Download all the data for detailed analysis.



How to access the unit with KIPLink

Direct access to the W3000TE control is achieved by scanning the QR-code positioned on the front side of the i-FX-G04 unit.




LED switch

The three-colour LED button positioned on the electrical board allows the user to switch the unit on/off and visualize the general status of the equipment without using any mobile device.

In addition (Opt. 1442, 1444) or in substitution (Opt. 6194, 6195) to the KIPLink, i-FX-G04 can be provided with: a 7" color touch screen interface or with a keyboard with large display and LED icons. In these cases, the LED switch is not provided. Remote keyboard is possible (Opt. C9261063, C9261064, C926108911, C926108913).

EXTENSIVE OPERATING LIMITS

A VERSION (High Efficiency)

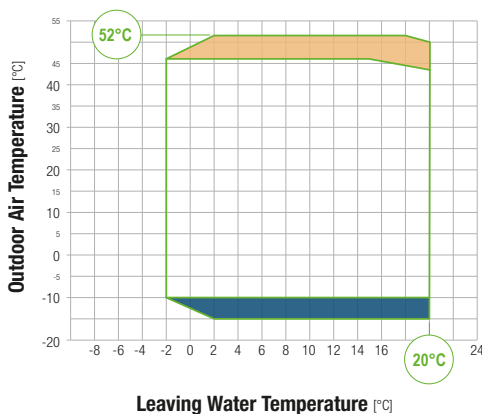

FULL LOAD OPERATION

- Standard unit
- Required: HT kit (Opt. 1955)
- Required: Low temp. device DBA (Opt. 813)

Air temp. < -10°C
Double insulation on heat exchangers (Opt. 2631)

LWT < 0°C
Compressor liquid injection (Opt. 871)

PARTIAL LOAD OPERATION

In case of higher outdoor air temperature, i-FX-G04 automatically partializes its resources to ensure uninterrupted operation. Operating limits when working partialized (water +7°C):

/A /SL-A 55°C

Climaveneta brand products have always been synonymous for best in class performance and high versatility. This is particularly true for i-FX-G04, the innovative chiller where all the features have been designed for complete customer peace of mind.

Hydronic modules and flow controls

i-FX-G04 units come equipped as standard with terminal and modulating signal (0-10V) to control the activation and speed of one external variable speed pump, with the internally developed VPF.E control logic, which adjusts the pump speed on the basis of the plant's thermal load, in order to maintain the defined plant-side ΔT (primary circuit).

Factory-mounted pump group

2 pumps (duty/standby) provide low or high head (available head approx. 100 or 200 kPa)

Fixed speed pumps

1 pump, 2-pole motor: Opt. 4706 (LH) / 4707 (HH)
 2 pump, 2-pole motor: Opt. 4711 (LH) / 4712 (HH)
 2 pump, 4-pole motor: Opt. 4708 (LH) / 4709 (HH)

Variable speed pumps

1 pump, 2-pole motor: Opt. 4717 (LH) / 4718 (HH)
 2 pump, 2-pole motor: Opt. 4722 (LH) / 4723 (HH)
 2 pump, 4-pole motor: Opt. 4719 (LH) / 4721 (HH)

Terminals for external pump control

The unit controls the activation or the activation and speed of 1 or 2 external pumps.

Terminals + Modulating signal

1 pump: Standard
 2 pumps: Opt. 4714

These arrangements allow you to control the activation / deactivation of fixed speed pumps too!

Other possible variable primary flow control logics:



VPF control logic

The VPF control series (Variable Primary Flow) doesn't only **adjust the pump speed on the basis of the plant's thermal load**, but also **dynamically optimizes the unit's thermoregulation** for variable flow operation, thus ensuring both the highest pump energy savings and chiller stable operation.

VPF: constant ΔP on the plant side

For systems with only the primary circuit.
 Opt. 4864 or 4865 for single unit system
 Opt. 4866 for multi-unit system

VPF.D: constant ΔT on the plant side

For systems with primary and secondary circuits separated by a hydraulic decoupler.
 Opt. 4867 for single unit system
 Opt. 4868 for multi-unit system

Close-coupled pumps by Grundfos



SiC/SiC (silicon carbide) primary seal pairing, extremely resistant against wear, abrasive particles and wear.

EPDM bellows seal prevent the risk of deposits, such as rust, on the shaft.

Pull-out design: during maintenance the power head can be pulled out without removing the pump housing from the pipework.

In-line or end-suction models were chosen based on dimensions and performances

ACCESSORIES AND SERVICES

MICROCHANNEL COILS

Al - Regular (std)

Al - E-coating (Opt. 876)



3120 h
SWAAT test
(ASTM G85-02 A3)

✓ UV rays
excellent

E-coating process



Alkaline
cleaning



Deionized
water rinse



E-coat
treatment




Final
rinse



Oven
bake



UV
topcoat

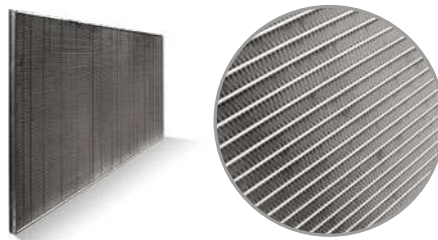

TUBE & FIN COILS

Cu/Al - Regular (Opt. 879)

Cu/Al - Pre-painted fins (Opt. 894)

Cu/Al - High pressure spray coating (Opt. 895 / RFQ)

Fin Guard Silver SB *

Opt. 895

Polyurethane resin with
aluminum fillers

✓ **3000 h** ASTM B117

✓ **UV** rays - excellent

* Thermoguard

PoluAl XT *

RFQ

Polyurethane resin with
aluminum fillers

✓ **4000 h** ASTM B117

✓ **UV** rays - excellent

* Blygold

Heresite P-413C *


RFQ

Phenolic resin

✓ **6000 h** ASTM B117

✓ **UV** rays - good

* Heresite Protective Coating, LLC

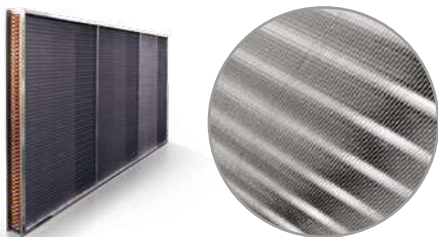

Cu/Cu - Tube & fin coil (Opt. 881)

WITNESS TESTING

Test your chiller before installation and make sure its' performance is totally reliable.

Performance WITNESS TEST

Performance Witness testing is available as additional service in order to allow the final user to see the unit being tested under specific conditions. Carried out within modern and sophisticated facilities, this service gives the customer the possibility to choose among different witness test options in order to:

- ▶ Verify unit operation under severe conditions
- ▶ Detect sound emissions
- ▶ Check performance, both at full and partial loads
- ▶ Test the unit with low outdoor air temperature operation
- ▶ Time the fast restart



All the flexibility you need to fit the most diverse application requirements

FURTHER OPTIONS

Auxiliary input

4-20 mA (Opt. 6161): Enables remote set-point adjustments (analog input).
Double set-point (Opt. 6162): Enables the remote switch between 2 set-points (digital input).
Demand limit (Opt. 6171): Limits the unit's power absorption for safety reasons or in temporary situations (digital input).

Electrical

Automatic circuit breakers for all major electrical loads (compressors excluded) (Opt. 3414):
 Protect all the major electrical loads (compressors excluded) from possible current peaks, over-current switches are provided in place of the standard fuses. The compressors are already protected by extra-fast fuses.

Connectivity

Serial card interface module to allow integration with BMS protocols:
Modbus (Opt. 4181) / LonWorks (Opt. 4182) / BACnet MS/TP (Opt. 4184) / BACnet over IP (Opt. 4185)
M-Net interface kit (Opt. 4187): Interface module to allow the integration of the unit with Mitsubishi Electric proprietary communication protocol M-Net.

Energy Meter

Energy meter for BMS (Opt. 5924): Acquires electrical data and the power absorbed by the unit and send them the BMS for energy metering (Modbus RS485).

Refrigerant circuit

Dual pressure relief valves with switch (Opt. 1961): One valve is isolated from the refrigerant circuit while the other is in service. The user can work on the isolated valve for periodic maintenance or replacement, without removing the refrigerant from the circuit.
Compressor suction valve (Opt. 1901): Installed on each compressor suction line, it simplifies maintenance activity (discharge valves are present as per standard).

Refrigerant leak detector

Leak detector + compressor off (Opt. 3433): Factory installed device. In case of a gas leak detection it raises an alarm and stops the units.

Hydraulic

Water flow switch (Opt. 1801): Designed to protect the unit where the water flow across the evaporator is not sufficient and falls outside of the operating parameters.
Delta T > 8°C (Opt. 2881): Evaporator designed to operate with low primary circuit water flow.
Flanged hydraulic connections (Opt. 2911): Grooved coupling with flanged counter-pipe.

Structure

Anti-intrusion grilles (Opt. 2021): Perimeter metal grilles to protect against the intrusion of solid bodies into the unit structure.
Rubber type (Opt. 2101) or spring type (Opt. 2102) anti-vibration mountings: Reduce vibrations, keeping noise transmission to a minimum.

Packing

Reinforcing bars (Opt. 1971): Steel brackets used to strengthen the unit structure. Suggested in case of long truck transport.
Nylon packing (Opt. 9966): i-FX-G04 is covered with a protective nylon layer and provided with the lifting eye-plates, to load the unit into a truck.
Container packing (Opt. 9979): i-FX-G04 is covered with a protective nylon layer, provided with structural reinforcing bars and equipped with both lifting eye-plates and handling devices to load it on a container (metal slides, front handling bar).



i-FX-G04 2202 - 7823

Air cooled chillers with inverter screw compressors and HFO refrigerant. From 377 to 1463 kW



i-FX-G04 /A		2202	2602	2702	2722	3602	4202	4802
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	(1)	kW	382,7	417,9	486,9	534,8	642,0	725,9
Total power input	(1)	kW	117,7	130,2	147,7	168,4	211,1	237,1
EER	(1)	kW/kW	3,251	3,210	3,297	3,176	3,041	3,062
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2)	kW	381,5	416,4	485,7	533,2	639,7	723,4
EER	(1)(2)	kW/kW	3,210	3,160	3,260	3,140	3,000	3,020
Cooling energy class			A	A	A	A	B	B
ENERGY EFFICIENCY								
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)								
Ambient refrigeration								
Prated,c	(7)	kW	382	416	486	533	640	723
SEER	(7)(8)		5,18	5,26	5,26	5,18	5,09	5,18
Performance ηs	(7)(9)	%	204	207	207	204	201	204
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	(1)	l/s	18,30	19,98	23,29	25,58	30,70	34,71
Pressure drop	(1)	kPa	35,3	42,1	30,1	36,4	46,1	46,8
REFRIGERANT CIRCUIT								
Compressors nr.		N°	2	2	2	2	2	2
No. Circuits		N°	2	2	2	2	2	2
Refrigerant charge		kg	63,0	70,0	81,0	86,0	108	124
NOISE LEVEL								
Sound Pressure	(3)	dB(A)	67	68	68	69	68	70
Sound power level in cooling	(4)(5)	dB(A)	99	100	100	101	101	103
SIZE AND WEIGHT								
Length	(6)	mm	4150	5400	5400	5400	6650	7900
Width	(6)	mm	2260	2260	2260	2260	2260	2260
Height	(6)	mm	2500	2500	2500	2500	2500	2500
Operating weight	(6)	kg	4780	5220	5360	5430	6060	6820

i-FX-G04 /A		4822	6002	6022	6603	7203	7223	7823
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	(1)	kW	915,7	994,1	1038	1146	1280	1399
Total power input	(1)	kW	305,7	322,1	340,6	379,0	423,0	471,2
EER	(1)	kW/kW	2,995	3,086	3,048	3,024	3,026	2,969
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2)	kW	912,6	991,0	1035	1143	1276	1394
EER	(1)(2)	kW/kW	2,960	3,050	3,010	2,990	2,990	2,930
Cooling energy class			B	A	A	B	B	B
ENERGY EFFICIENCY								
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)								
Ambient refrigeration								
Prated,c	(7)	kW	913	991	1035	1143	1276	1394
SEER	(7)(8)		5,06	5,13	5,09	5,11	5,04	5,04
Performance ηs	(7)(9)	%	199	202	200	201	199	197
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	(1)	l/s	43,79	47,54	49,65	54,79	61,21	66,89
Pressure drop	(1)	kPa	47,0	42,8	43,8	40,1	40,8	48,7
REFRIGERANT CIRCUIT								
Compressors nr.		N°	2	2	2	3	3	3
No. Circuits		N°	2	2	2	3	3	3
Refrigerant charge		kg	139	167	171	189	195	203
NOISE LEVEL								
Sound Pressure	(3)	dB(A)	72	72	72	72	72	73
Sound power level in cooling	(4)(5)	dB(A)	105	105	105	105	105	106
SIZE AND WEIGHT								
Length	(6)	mm	9150	10400	10400	11650	11650	12900
Width	(6)	mm	2260	2260	2260	2260	2260	2260
Height	(6)	mm	2500	2500	2500	2500	2500	2500
Operating weight	(6)	kg	8240	8780	8880	11170	11800	12430

Notes:

- 1 Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- 2 Values in compliance with EN14511-3:2013.
- 3 Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- 4 Sound power on the basis of measurements made in compliance with ISO 9614.
- 5 Sound power level in cooling, outdoors.

6 Unit in standard configuration/execution, without optional accessories.

7 Parameter calculated according to [REGULATION (EU) N. 2016/2281]

8 Seasonal energy efficiency ratio

9 Seasonal space cooling energy efficiency

The units highlighted in this publication contain HFO-1234ze [GWP₁₀₀ 7] fluorinated greenhouse gases.

Certified data in EUROVENT



i-FX-G04 /SL-A			2202	2602	2702	2722	3602	4202	4802
Power supply		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE									
COOLING ONLY (GROSS VALUE)									
Cooling capacity	(1)	kW	377,2	421,3	480,7	527,2	633,2	718,2	832,9
Total power input	(1)	kW	116,8	125,4	145,9	167,1	207,2	234,4	269,9
EER	(1)	kW/kW	3,229	3,360	3,295	3,155	3,056	3,064	3,086
COOLING ONLY (EN14511 VALUE)									
Cooling capacity	(1)(2)	kW	376,1	419,8	479,5	525,7	631,0	715,7	830,5
EER	(1)(2)	kW/kW	3,190	3,310	3,260	3,120	3,010	3,020	3,050
Cooling energy class			A	A	A	A	B	B	A
ENERGY EFFICIENCY									
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)									
Ambient refrigeration									
Prated,c	(7)	kW	376	420	480	526	631	716	830
SEER	(7)(8)		5,18	5,32	5,26	5,18	5,09	5,19	5,21
Performance ηs	(7)(9)	%	204	210	207	204	201	205	205
EXCHANGERS									
HEAT EXCHANGER USER SIDE IN REFRIGERATION									
Water flow	(1)	l/s	18,04	20,15	22,99	25,21	30,28	34,34	39,83
Pressure drop	(1)	kPa	34,3	42,8	29,4	35,3	44,8	45,9	38,9
REFRIGERANT CIRCUIT									
Compressors nr.		N°	2	2	2	2	2	2	2
No. Circuits		N°	2	2	2	2	2	2	2
Refrigerant charge		kg	63,0	73,0	81,0	86,0	108	124	134
NOISE LEVEL									
Sound Pressure	(3)	dB(A)	60	61	61	62	61	63	63
Sound power level in cooling	(4)(5)	dB(A)	92	93	93	94	94	96	96
SIZE AND WEIGHT									
Length	(6)	mm	4150	5400	5400	5400	6650	7900	9150
Width	(6)	mm	2260	2260	2260	2260	2260	2260	2260
Height	(6)	mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(6)	kg	5020	5600	5680	5760	6390	7160	8400

i-FX-G04 /SL-A			4822	6002	6022	6603	7203	7223	7823
Power supply		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE									
COOLING ONLY (GROSS VALUE)									
Cooling capacity	(1)	kW	902,8	972,2	1024	1141	1262	1391	1458
Total power input	(1)	kW	303,4	318,4	337,4	376,1	416,2	468,8	499,7
EER	(1)	kW/kW	2,976	3,053	3,035	3,034	3,032	2,967	2,918
COOLING ONLY (EN14511 VALUE)									
Cooling capacity	(1)(2)	kW	899,8	969,3	1021	1138	1258	1386	1455
EER	(1)(2)	kW/kW	2,940	3,020	3,000	3,000	3,000	2,930	2,890
Cooling energy class			B	A	A	B	B	B	B
ENERGY EFFICIENCY									
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)									
Ambient refrigeration									
Prated,c	(7)	kW	900	969	1021	1138	1258	1386	1455
SEER	(7)(8)		5,06	5,12	5,10	5,12	5,11	5,10	5,01
Performance ηs	(7)(9)	%	199	202	201	202	201	201	197
EXCHANGERS									
HEAT EXCHANGER USER SIDE IN REFRIGERATION									
Water flow	(1)	l/s	43,17	46,49	48,96	54,56	60,35	66,50	69,70
Pressure drop	(1)	kPa	45,7	40,9	42,6	39,7	39,7	48,1	30,9
REFRIGERANT CIRCUIT									
Compressors nr.		N°	2	2	2	3	3	3	3
No. Circuits		N°	2	2	2	3	3	3	3
Refrigerant charge		kg	139	167	171	189	204	213	223
NOISE LEVEL									
Sound Pressure	(3)	dB(A)	63	63	63	63	63	64	64
Sound power level in cooling	(4)(5)	dB(A)	96	96	96	96	96	97	97
SIZE AND WEIGHT									
Length	(6)	mm	9150	10400	10400	11650	12900	12900	12900
Width	(6)	mm	2260	2260	2260	2260	2260	2260	2260
Height	(6)	mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(6)	kg	8550	9090	9180	11620	12660	12950	12890

Notes:

- 1 Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- 2 Values in compliance with EN14511-3:2013.
- 3 Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- 4 Sound power on the basis of measurements made in compliance with ISO 9614.
- 5 Sound power level in cooling, outdoors.

6 Unit in standard configuration/execution, without optional accessories.

7 Parameter calculated according to [REGULATION (EU) N. 2016/2281]

8 Seasonal energy efficiency ratio

9 Seasonal space cooling energy efficiency

The units highlighted in this publication contain HFO-1234ze [GWP₁₀₀ 7] fluorinated greenhouse gases.

Certified data in EUROVENT

“BY FAR THE BEST PROOF IS EXPERIENCE”

Sir Francis Bacon

British philosopher (1561 - 1626)

DE BIJENKORF AMSTERDAM

2018 Amsterdam - Netherlands

Retail

Cooling capacity: 415 kW

Installed machines:

1x FX HFO SL-A screw compressor chiller with HFO refrigerant



GABBANA

017 Windhof - Luxembourg

Office buildings

Cooling capacity: 386 kW

Installed machines:

1x FX-FC HFO/NG/SL-T+/S screw compressor chiller with HFO refrigerant



Watermark Livingston Business Park

2017 Livingston - Great Britain

Office Buildings - Mixed-Use Development

Cooling capacity: 1412 kW

Installed machines:

3x TECS HFO oil-free compressor chillers with HFO refrigerant



Soclima

2017 Foetz - Luxembourg

Office building

Cooling capacity: 1016 kW

Installed machines:

1x FOCS2-W HFO screw compressor chiller with HFO refrigerant,
1x TECS2-W HFO oil-free compressor chiller with HFO refrigerant



Every project is characterised by different needs and system specifications for various climates. All these projects share high energy efficiency, maximum integration, and total reliability resulting from the Climaveneta brand experience.

UEFA

2017 Nyon - Switzerland

Sport structures

Cooling capacity: 512 kW

Installed machines:

2xFOCS2-W HFO /R /CA-E screw compressor chillers with HFO refrigerant



Siemens

2017 Zurich - Switzerland

Office Building

Cooling capacity: 1015 kW

Heating capacity: 1340 kW

Installed machines:

2x FOCS2-W HFO screw compressor chillers with HFO refrigerant



Hotel Atlantic

2017 Stavanger - Norway

Hotel and resorts

Cooling capacity: 675 kW

Installed machines:

2x FOCS2-W HFO screw compressor chillers with HFO refrigerant



Genève Plage

2015 Geneve - Switzerland

Sport structures

Heating capacity: 700 kW

Installed machines:

2x TECS2-W HFO oil-free compressor chillers with HFO refrigerant





for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

Head Office: Via Caduti di Cefalonia 1 - 36061 Bassano del Grappa (VI) - Italy

Tel (+39) 0424 509 500 - Fax (+39) 0424 509 509

www.climaveneta.com

www.melcohit.com